


LE 6 R1388



Robot Dimensions

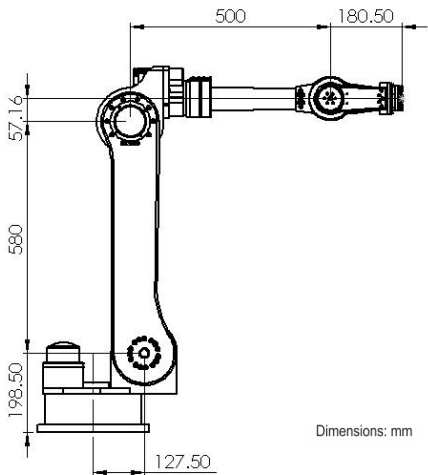

Technical Data

Maximum reach	1388 mm
Maximum payload	12.5 kg
Rated payload	10 kg
Rated supplementary load, rotating arm / arm	column / link 0 kg / 0 kg / 10 kg
Pose repeatability	0.1mm
Number of axes	6
Mounting position	Floor / Ceiling
Footprint	Ø 280 mm
Weight	approx. 75 kg

Axis Data

Motion range	
A1	±165 °
A2	-165 ° / 12 °
A3	-125 ° / 125 °
A4	±185 °
A5	±120 °
A6	±350 °
Speed with rated payload	
A1	30 °/s
A2	30 °/s
A3	30 °/s
A4	30 °/s
A5	30 °/s
A6	30 °/s

Operating Conditions

Ambient temperature during operation	5 °C to 45 °C (278 K to 318 K)
--------------------------------------	--------------------------------

Details provided about the properties and usability of the products are purely for information purposes and do not constitute a guarantee of these characteristics. The extent of goods delivered and services performed is determined by the subject matter of the specific contract. No liability accepted for errors or omissions.

LE Robotics (Pvt) Ltd, 100/4 Divulapitiya Rd, Minuwangoda. Sri Lanka. Tel.: +94 777688894, lerobotics.lk